

Specification Sheet: G2 LED Utility & High-Power Lamps


The Energy Efficient LED Solution

Revolution Lighting makes saving energy as easy as screwing in a light bulb with the new G2 LED Utility & High-Power Lamps. These LED lamps offer a low-wattage solution to wasteful HID lamps and can save you up to 70% in electricity. Each LED lamp can be mounted in any orientation and comes with either a standard E39/E40 screw-in mogul base or an extended-tip EX39/EX40 screw-in base. Illumination options include an omnidirectional light output or a broad 130° rotatable beam to fit your specific lighting needs. All G2 LED Utility & High-Power Lamps carry a 5-year limited warranty.


APPLICATIONS

- Retail
- Hotels
- Commercial Buildings
- Parking Lots
- Roadway Lighting
- Warehouses
- Big-Box Stores

BEAM ANGLE

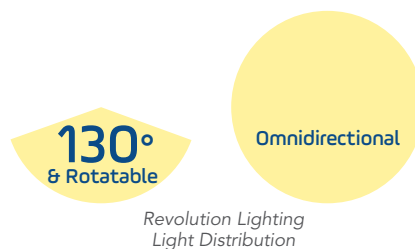

CAN DECREASE ENERGY USAGE BY



WARRANTY



Our Industry-Leading 5-Year Limited Warranty Guarantees Unsurpassed Quality

PRODUCT BENEFITS

OPERATIONAL

- 3X greater lamp life than fluorescent
- 50,000-hour lamp life reduces long-term maintenance costs
- Instant on, no warm-up time
- Can be mounted in any orientation

SAFETY

- No glass
- Negligible light depreciation over time
- Superior light output

SUSTAINABILITY

- Lack of UV or IR minimizes concerns with fading or discoloration
- Mercury-free, allowing for non-hazardous disposal
- 100% recyclable



High Power Omni 360



Utility Omni 360



Utility Semi 130



Specification Sheet: G2 LED Utility & High-Power Lamps

TECHNICAL DATA (Subject to change.)

Catalog No.	Product SKU No.	Rated Watts	Base	Voltage (VAC)	Color Temp (K)	Rated Lumens	Rated Efficacy (lm/W)	CRI	Beam Angle	Rated Life (Hours)	Operating Temp. (°F)
G2 LED Utility & High-Power Lamps											
G2UL-30-40-RD-E39	131331-003	27.3	E39	120-277	4000	2,928	107	82	130° & Rotatable	50,000	-20 to 140
G2UL-19-30-OD-E39	131232-201	19	E39	120-277	3000	2,470	130	80	Omnidirectional	50,000	-20 to 140
G2UL-19-50-OD-E39	131232-205	19	E39	120-277	5000	2,470	130	80	Omnidirectional	50,000	-20 to 140
G2UL-27-30-OD-EX39	131434-201	27	EX39	120-277	3000	3,240	120	80	Omnidirectional	50,000	-20 to 140
G2UL-36-40-OD-EX39	131435-203	36	EX39	120-277	4000	4,320	120	80	Omnidirectional	50,000	-20 to 140
G2UL-45-40-OD-EX39	131436-203	45	EX39	120-277	4000	5,400	120	80	Omnidirectional	50,000	-20 to 140
G2UL-45-50-OD-EX39	131436-205	45	EX39	120-277	5000	5,400	120	80	Omnidirectional	50,000	-20 to 140
G2HPL-80-40-OD-EX39	133431-203	80	EX39	120-277	4000	10,000	125	80	Omnidirectional	50,000	-20 to 140
G2HPL-100-50-OD-EX39	133432-205	100	EX39	120-277	5000	12,500	125	80	Omnidirectional	50,000	-20 to 140
G2HPL-125-50-OD-EX39	133433-205	125	EX39	120-277	5000	15,625	125	80	Omnidirectional	50,000	-20 to 140

Product is DLC listed.

PHYSICAL DATA

Catalog No.	Product SKU No.	Product Dimensions (in.)	Product Weight (lb)
G2 LED Utility & High-Power Lamps			
G2UL-30-40-RD-E39	131331-003	8.8L x 3.5 Dia.	1.38
G2UL-19-30-OD-E39	131232-201	6.8L x 2.8 Dia.	0.75
G2UL-19-50-OD-E39	131232-205	6.8L x 2.8 Dia.	0.75
G2UL-27-30-OD-EX39	131434-201	8.5L x 3.3 Dia.	1.57
G2UL-36-40-OD-EX39	131435-203	9.5L x 3.3 Dia.	1.76
G2UL-45-40-OD-EX39	131436-203	10.8L x 3.3 Dia.	1.92
G2UL-45-50-OD-EX39	131436-205	10.8L x 3.3 Dia.	1.92
G2HPL-80-40-OD-EX39	133431-203	11.6 x 5.1 Dia.	3.63
G2HPL-100-50-OD-EX39	133432-205	12.5L x 5.1 Dia.	4.05
G2HPL-125-50-OD-EX39	133433-205	14L x 5.1 Dia.	4.49