



NVLAP LAB CODE 500080-0

Ref. No.: LCZP18050033

Version: 1.0

Date of Issue: May. 8, 2018

Total pages: 8

Test report of

## IES LM-79-08

**Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products**

Rendered to:

Revolution Lighting Technologies, Inc.  
2280 Ward Ave Simi Valley, CA 93065, USA

For products:

2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces

Models No.:

154036-115

**Test Date:** Nov. 1, 2017

**Test Item:** Total Electrical values, Chromaticity coordinates, CCT and CRI.

**Test Lab.:** **LCTECH (Zhongshan) Testing Service Co., Ltd**

2/F., Technology and Enterprise Development Center, Guangyuan Road, Xiaolan,  
Zhongshan, Guangdong, China

Tel: +86-760-22833366

Fax: +86-760-22833399

E-mail: [Service@lccert.com](mailto:Service@lccert.com)

<http://www.lccert.com>

**Template No.:** LC-RT-PL/LM79-08/12

**Test Note:** *This report was based on the LCZP17060532 except the applicant, brand name and model number.*

---

**Complied by:**

**Bowen Pang**  
Project Engineer  
May. 8, 2018

**Reviewed by:**

**Richard Li**  
Technical Manager  
May. 8, 2018

---

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.



## Table of Contents

<b>1. General</b> .....	3
1.1 Product Information .....	3
1.2 Standards or methods .....	4
1.3 Equipment list .....	4
<b>2. Test conducted and method</b> .....	5
2.1 Ambient Condition .....	5
2.2 Power Supply Characteristics .....	5
2.3 Seasoning and Stabilization .....	5
2.4 Electrical Instrumentation .....	5
2.5 Color Measurement Method .....	5
2.6 Total Luminous Flux Measurement Method .....	5
2.7 Luminous Intensity Distribution Measurement Method .....	5
2.8 Spatial Non-uniformity of Chromaticity .....	5
<b>3. Test Result Summary</b> .....	6
3.1 Electrical data .....	6
3.2 Photometric data .....	6
3.3 Color Rendering Details .....	6
3.4 Additional test at 277V .....	6
<b>4. Test Data</b> .....	7
4.1 Spectral Distribution .....	7
4.2 ANSI Chromaticity Quadrangles Diagram .....	7
<b>Appendix 1 Product Photo</b> .....	8



## 1. General

### 1.1 Product Information

Brand Name	Revolution Lighting Technologies
Category	Indoor
General Application	Troffer
Primary Use	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
Model Number	154036-115
Rated Inputs	100-277V, 50/60Hz
Rated Power	50W
Rated Light output	6650lm
Declared CCT	5000K
Power Supply	N/A
LED Package, Array or Module	Model: 67-21S Series, manufactured by EVERLIGHT ELECTRONICS CO., LTD
Receipt Samples	1 unit
Sample Code of lab.	171028105001
Date of Receipt Samples	Oct. 28, 2017
Note	-



**1.2 Standards or methods**

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2015	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

**1.3 Equipment list**

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2017-02-04	2018-02-03
AC Power supply	LC-I-987	APW-110N	2017-02-04	2018-02-03
Power analyzer	LC-I-928	WT210	2017-01-19	2018-01-19
Power analyzer	LC-I-954	WT210	2017-02-04	2018-02-03
Multimeter	LC-I-972	Fluke 17B	2017-08-10	2018-08-09
Photometric colorimetric electric system (2 meter sphere)	LC-I-900	SPR3000	Before use	Before use
Standard lamp	LC-PL-I-011	D204C	2017-09-07	2018-09-06
Luminous Flux Standard Lamp	LC-PL-I-003	24V100W	2017-10-08	2018-10-07
Goniophotometer(with mirror)	LC-I-902	GMS2000	2017-05-07	2018-05-07
Wireless temperature transmitter	LC-I-978	DWRF-B	2017-02-10	2018-02-10
Wireless temperature transmitter	LC-I-979	DWRF-B	2017-02-10	2018-02-10

## 2. Test conducted and method

The luminaire was operated at least 2 hours to reach stabilization and temperature equilibrium before test.

### 2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at  $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$ ; the air flow around the sample(s) being tested did not affect the performance.

### 2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within  $\pm 0.2$  percent under load.

### 2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

### 2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval,  $k=2$ ).

### 2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

### 2.6 Total Luminous Flux Measurement Method

The customer did not require this measurement.

### 2.7 Luminous Intensity Distribution Measurement Method

The customer did not require this measurement.

### 2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.

### 3. Test Result Summary

#### 3.1 Electrical data

Criteria Item	Result
Input Voltage & Frequency	119.97V~60Hz
Input Current(A)	0.436
Total Power(W)	52.02
Power Factor	0.994
I-THD	5.16%
Off-state Power(W)	-

#### 3.2 Photometric data

Criteria Item	Result
Total Lumens(lm)	-
Luminaire Efficacy(Lm/W)	-
Correlated Color Temperature (CCT)(K)	5218
Color Rendering Index (CRI)	85.2
R9	16
Chromaticity Coordinate (x,y)	x = 0.3394 y = 0.3494
Chromaticity Coordinate (u,v)	u = 0.2084 v = 0.3218
Chromaticity Coordinate (u',v')	u' = 0.2084 v' = 0.4827
Duv	0.00123

#### 3.3 Color Rendering Details

R1	R2	R3	R4	R5	R6	R7	R8
84	92	95	84	84	87	87	69
R9	R10	R11	R12	R13	R14	R15	-
16	79	83	62	87	97	80	-


#### 3.4 Additional test at 277V

Criteria Item	Result
Input Voltage & Frequency	277.03V~60Hz
Power Factor	0.908
I-THD	9.16%
Off-state Power(W)	-


Note: N.A.

## 4. Test Data

### 4.1 Spectral Distribution

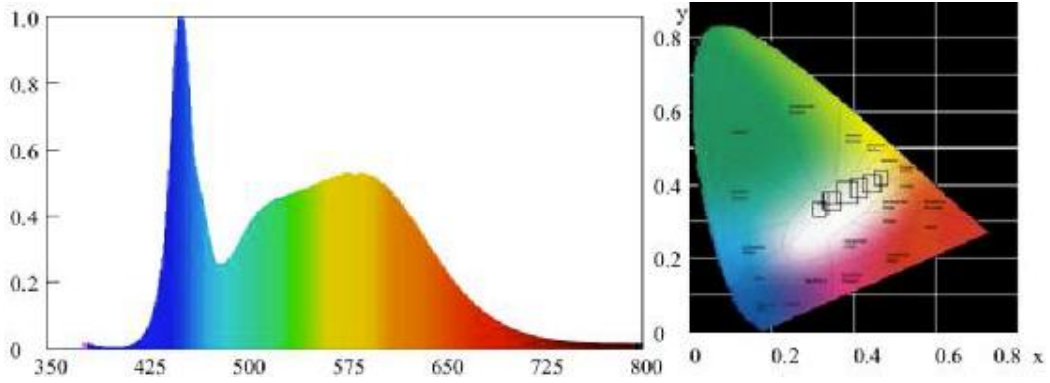

### 4.2 ANSI Chromaticity Quadrangles Diagram

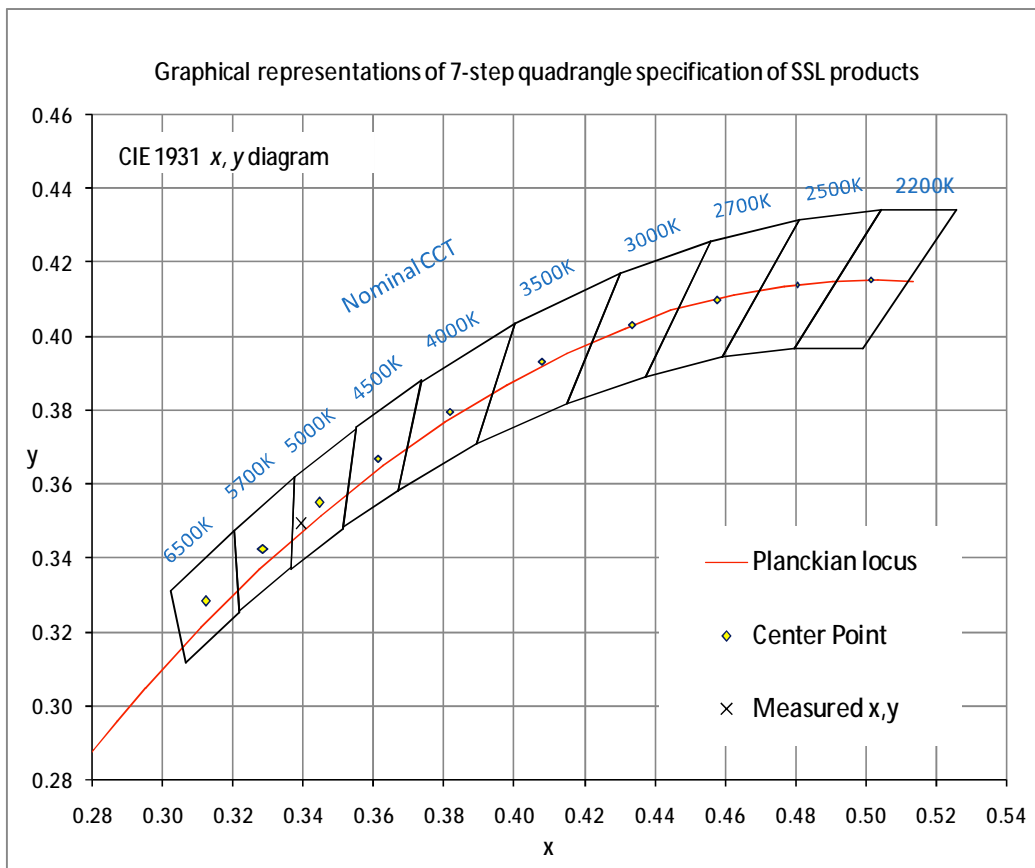

### Appendix 1 Product Photo



Picture 1



Picture 2

\*\*\*\*End of test report\*\*\*\*