

Specification Sheet: Revolver LED Architectural Wall Pack

The Energy Efficient LED Solution

Whether you want to light your building exterior in complementary light to show it at its best or provide better security, the Revolver LED Architectural Wall Pack delivers an energy-saving lighting option with a unique adaptable design featuring rotatable LED modules. Change the beam direction up to 360° to put the light right where you want it. These high-performance, IP65-rated wall packs work well in wet or dry conditions, and they come with a 50,000-hour rated lifetime and 5-year warranty.

APPLICATIONS

- Walkways
- Building Perimeters
- Security Areas
- Parking Structures
- Egress Illumination

BEAM ANGLE

60°

Revolution Lighting
Light Distribution

CAN DECREASE ENERGY USAGE BY

50%

vs. Similar
Fluorescent Lamps

WARRANTY



Our Industry-Leading 5-Year Limited Warranty Guarantees Unsurpassed Quality

PRODUCT BENEFITS

OPERATIONAL

- Longer life than fluorescent & metal halide lamps
- 50,000-hour lamp life reduces long-term maintenance costs
- Instant on, no warm-up time
- Lightweight aluminum construction
- Durable bronze powder-coated housing

SAFETY

- No glass
- Negligible light depreciation over time
- Superior light output
- IP65

SUSTAINABILITY

- Mercury-free, allowing for non-hazardous disposal
- 100% recyclable



Single-Module Revolver LED Architectural Wall Packs



Dual-Module Revolver LED Architectural Wall Packs

ORDER LOGIC (Ex. Ex. RAWP-25-1M-SV-BZ-40-ND)

Product Description	Bare Lamp Wattage	Number of LED Modules	Input Voltage (VAC)	Housing Color	CCT (K Temp)	Dimming Option
RAWP = Revolver Architectural Wall Pack	- 25 = 25W	- 1M = 1 Module	- SV = 120-277VAC	- BZ = Bronze	- 40 = 4000K - 50 = 5000K	- ND = Non-Dimmable
	- 40 = 40W	- 2M = 2 Modules				
	- 60 = 60W					
	- 80 = 80W					



Specification Sheet: Revolver LED Architectural Wall Pack

TECHNICAL DATA (Subject to change.)

Catalog No.	Product SKU No.	Rated Watts	Input Voltage (VAC)	Color Temp (K)	Rated Lumens	Rated Efficacy (lm/W)	CRI	Beam Angle (°)	Rated Life (Hours)	Operating Temp. (°F)
25W Single-Module Revolver LED Architectural Wall Pack										
RAWP-25-1M-SV-BZ-40-ND	282401-013	24.3	120-277	4000	3,126	128	70	60	50,000	-4 to 113
RAWP-25-1M-SV-BZ-50-ND	282401-015	24.2	120-277	5000	3,160	130	70	60	50,000	-4 to 113
40W Single-Module Revolver LED Architectural Wall Pack										
RAWP-40-1M-SV-BZ-40-ND	282402-013	39.1	120-277	4000	4,903	125	70	60	50,000	-4 to 113
RAWP-40-1M-SV-BZ-50-ND	282402-015	39.2	120-277	5000	5,001	127	70	60	50,000	-4 to 113
60W Dual-Module Revolver LED Architectural Wall Pack										
RAWP-60-2M-SV-BZ-40-ND	282404-013	59.8	120-277	4000	7,721	129	70	60	50,000	-4 to 113
RAWP-60-2M-SV-BZ-50-ND	282404-015	59.5	120-277	5000	7,787	130	70	60	50,000	-4 to 113
80W Dual-Module Revolver LED Architectural Wall Pack										
RAWP-80-2M-SV-BZ-40-ND	282405-013	79.2	120-277	4000	10,058	127	70	60	50,000	-4 to 113
RAWP-80-2M-SV-BZ-50-ND	282405-015	79.2	120-277	5000	10,228	129	70	60	50,000	-4 to 113

Product is DLC-Premium


Note: DLC listings are based on the illumination measured when the LED modules are locked in the face-down position.

PHYSICAL DATA


Catalog No.	Product SKU No.	Product Dimensions (in.)	Product Weight (lb)
25W Single-Module Revolver LED Architectural Wall Pack			
RAWP-25-1M-SV-BZ-40-ND	282401-013	9.13W x 5.67L x 5.2H	4.1
RAWP-25-1M-SV-BZ-50-ND	282401-015	9.13W x 5.67L x 5.2H	4.1
40W Single-Module Revolver LED Architectural Wall Pack			
RAWP-40-1M-SV-BZ-40-ND	282402-013	9.13W x 5.67L x 5.2H	4.5
RAWP-40-1M-SV-BZ-50-ND	282402-015	9.13W x 5.67L x 5.2H	4.5
60W Dual-Module Revolver LED Architectural Wall Pack			
RAWP-60-2M-SV-BZ-40-ND	282404-013	9.13W x 10.04L x 5.2H	6.8
RAWP-60-2M-SV-BZ-50-ND	282404-015	9.13W x 10.04L x 5.2H	6.8
80W Dual-Module Revolver LED Architectural Wall Pack			
RAWP-80-2M-SV-BZ-40-ND	282405-013	9.13W x 10.04L x 5.2H	6.9
RAWP-80-2M-SV-BZ-50-ND	282405-015	9.13W x 10.04L x 5.2H	6.9

Specification Sheet: Revolver LED Architectural Wall Pack

DIMENSIONAL DRAWINGS

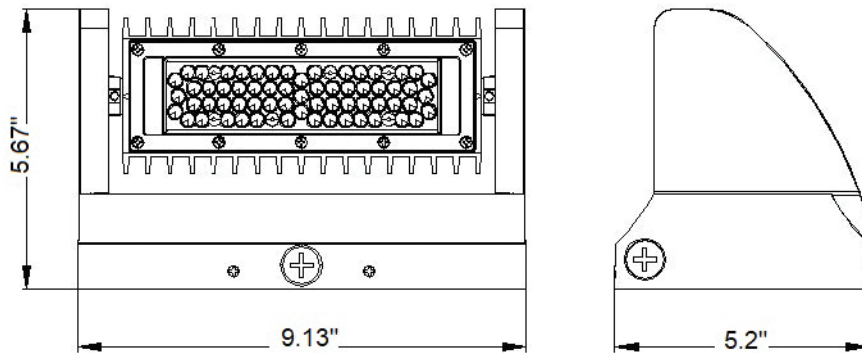

Single-module dimensions shown (25W & 40W)

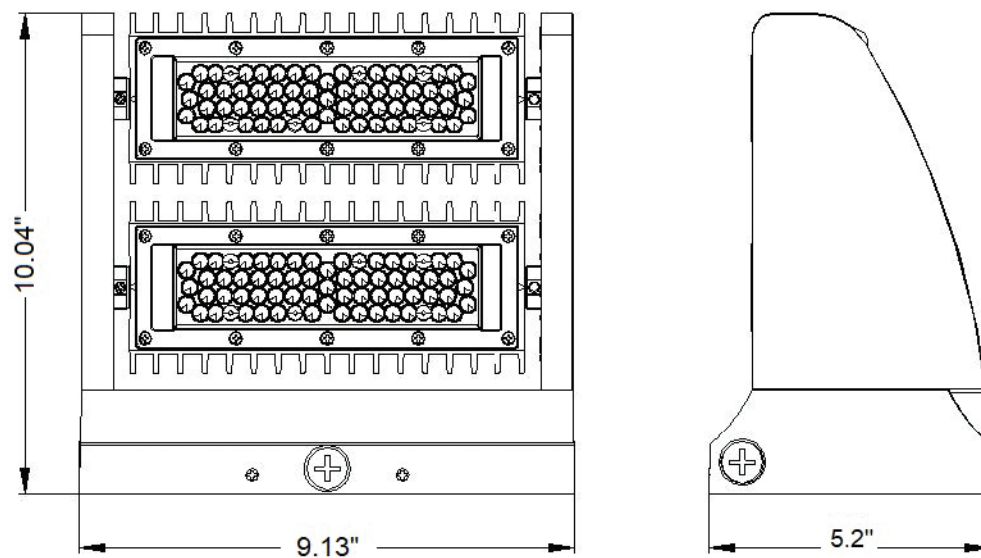

Dual-module dimensions shown (60W & 80W)